



## 4-Port Polarization Maintaining Circulator (DPMCIR Series)

Rev 11

### Description

The 2 × 2 Polarization Maintaining Circulator is a compact, high performance lightwave component that routes incoming signals from Port 1 to Port 2, incoming Port 2 signals to Port 3, and incoming Port 3 signals to Port 4. This component provides high isolation, low insertion loss, high extinction ratio, and excellent environment stability.


### Specifications

Parameter	Unit	Type A	Type B
Center Wavelength ( $\lambda_c$ )	nm	2000	
Operating Wavelength Range	dB	$\lambda_c \pm 30$	$\lambda_c \pm 20$
Typ. Insertion Loss (for Type1), $\lambda_c$ , 23 °C	dB	1.3	1.2
Max. Insertion Loss (for Type1), - 5 to + 70 °C, all wavelength range	dB	1.6	1.5
Typ. Insertion Loss (for Type2), $\lambda_c$ , 23 °C	dB	1.5	1.4
Max. Insertion Loss (for Type2), - 5 to + 70°C, all wavelength range	dB	1.8	1.7
Peak Isolation	dB	52	40
Typ. Isolation, $\lambda_c$ , 23 °C	dB	50	30
Min. Isolation, all wavelength range, 23 °C	dB	40	20
Min. Extinction Ratio	dB	18	18
Min. Crosstalk (1 → 3, 2 → 4)	dB	50	
Min. Return Loss	dB	55	
Max. Optical Power (Continuous Wave)	mW	300	
Fiber Type		Type1: PM 1550 Panda Fiber for all Ports Type2: PM 1950 Panda Fiber for all Ports	
Max. Tensile Load	N	5	
Operating Temperature	°C	- 5 to + 70	
Storage Temperature	°C	- 40 to + 85	

<sup>1</sup>IL is 0.3 dB higher, RL is 5 dB lower, and ER is 2 dB lower for each connector added. Connector key is aligned to slow axis.

<sup>2</sup>The routing path: Type A: 1 → 2, 2 → 3, 3 → 4; Type B: 1 → 2, 2 → 3, 3 → 4, 4 → 1.

### Package Dimensions

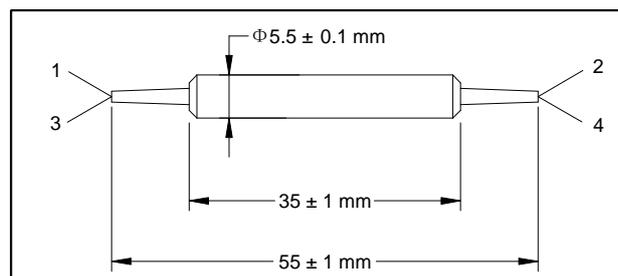

### Ordering Information

DPMCIR-①①①①-②-③-④-⑤-⑥

①①①①: Wavelength	②: Type	③: Connector Type	④: Fiber Jacket	⑤: Fiber Length
2000 - 2000 nm	1 - Type A	1 - FC/UPC	B - 250 $\mu$ m Panda Fiber	Q - 0.75 m
SS - Specify	2 - Type B	2 - FC/APC	L - 900 $\mu$ m Loose Tube	S - Specify
		3 - SC/UPC	S - Specify	

⑥: Fiber Type

1 - Type1: PM 1550

2 - Type2: PM 1950



日本デバイス株式会社 E-mail [sales@j-device.com](mailto:sales@j-device.com)

[www.j-device.com](http://www.j-device.com)

Tel 03-6262-3424 Fax 03-6800-5883