



Polarization Maintaining Fused Wavelength Division Multiplexer (980/1550) (PMWDM Series)

Rev 11G

Description

The Polarization Maintaining Fused Wavelength Division Multiplexer combine or separate light at different wavelengths. They offer very low insertion loss, high extinction ratio, and excellent environmental stability. These components can be operated on both fast and slow axis.

Key Features

- High Extinction Ratio
- Low Insertion Loss
- Excellent Environmental Stability

Applications

- Fiber Laser
- Fiber Amplifier

Specifications

Parameter	Unit	Value
Longer Operating Wavelength	nm	1550 ± 20
Max. Insertion Loss ¹	dB	0.7
Min. Isolation ¹	dB	17
Min. Extinction Ratio ²	dB	20
Shorter Operating Wavelength	nm	980 ± 10
Max. Insertion Loss ¹	dB	0.7
Min. Isolation ¹	dB	17
Thermal Stability	dB/°C	≤ 0.005
Min. Return Loss ³	dB	55
Min. Directivity	dB	55
Max. Optical Power (Continuous Wave)	mW	300
Fiber Type ⁴	-	PM Panda Fiber
Operating Temperature	°C	- 5 to + 70
Storage Temperature	°C	- 40 to + 85



¹Test at central wavelength only. IL is 0.5 dB higher for each connector added. Connector key is aligned to slow axis.

²ER is 2 dB lower for each connector added.

³RL is 5 dB lower for connector added.

⁴For PM 980 fiber option, the components can only operate on slow axis.

Package Dimensions

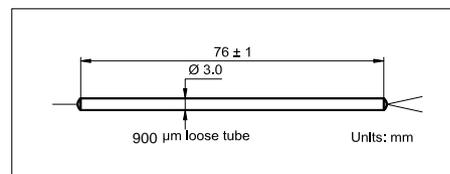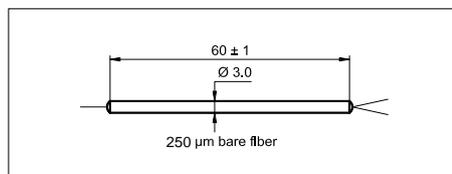

Ordering Information

PMWDM-①-②②②②②②②②-③-④-⑤-⑥

①: Configuration

1 - 1 × 2

②②②②②②②②: Wavelength

9801550 - 980 & 1550 nm

③: Connector Type

1 - FC/UPC 4 - SC/APC

2 - FC/APC N - None

3 - SC/UPC S - Specify



日本デバイス株式会社 E-mail sales@j-device.com

www.j-device.com

Tel 03-6262-3424 Fax 03-6800-5883

④: Fiber Jacket

B - 250 μ m Bare Fiber

L - 900 μ m Loose Tube

⑤: Fiber Length

Q - 0.75 m

S - Specify

⑥: Fiber Type

4 - Corning Panda PM 980

6 - Corning Panda PM 1550



日本デバイス株式会社 E-mail sales@j-device.com

www.j-device.com

Tel 03-6262-3424 Fax 03-6800-5883