


## 20 dBm Output, O-Band Amplifier

Model Number: **BDFA-CW-1300-RS-20-17-FCA**

Product Code: **1912**

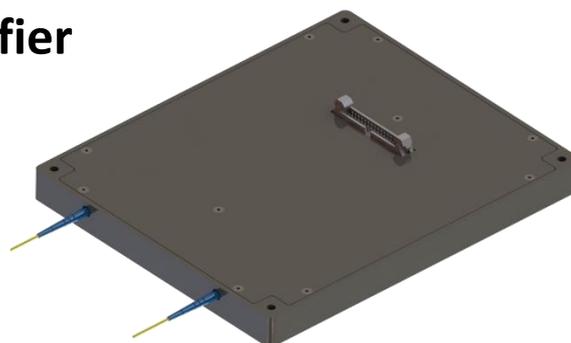

### Specifications:

Doc#: NP-TS-2610 November, 2023

Parameters	Specifications
Optimized Wavelength Range	1270 – 1340 nm
Gain Flattening Filter	Not included
Signal Input Power	0 to +15 dBm, 1300 nm typical
Optical Gain	17 dB, tested with +3 dBm input at 1300 nm
Small Signal Gain, -30 dBm input	25 dB typical, tested with -30 dBm input at 1300 nm
Optical Input / Output Fiber	FC/APC, SMF-28
Input Power Monitoring Range	-30 dBm to +10 dBm
Output Power Monitoring Range	-5 to +20 dBm
Input Power Measurement Accuracy	≤ +/- 0.3 dB, 1300 nm
Output Power Measurement Accuracy	≤ +/- 0.3 dB, 1300 nm
Noise Figure	6.0 dB typical, -30 dBm 1300 nm input, ≥ 25 dB signal gain
Control and Communication Interface	RS-232
Dimension	7 x 5.8 x 0.59 inch [178 x 147 x 15 mm]
DC Input voltage	12 VDC +/- 5%
Electrical Power Consumption	≤ 15 W
Operational Case Temperature Range	+5 to +45°C
Storage Temperature Range	-10 to +70°C



日本デバイス株式会社 E-mail [sales@j-device.com](mailto:sales@j-device.com)

[www.j-device.com](http://www.j-device.com)

Tel 03-6262-3424 Fax 03-6800-5883

Proprietary Information of Nuphoton Technologies

Manufactured in the USA

[info@nuphoton.com](mailto:info@nuphoton.com)

+1-(951)-696-8366

+1-(951) 696-8394